


<u>Features</u>

- » Optimized sound characteristics for Mercedes vehicles for a spectacular sound in combination with significantly increased power handling.
- » Exclusively developed baskets and car-specific connectors for Mercedes vehicles for easiest installation.
- » 2-way component system UP C42MB-FRT equipped with separate crossover with 6 dB slope and 3-stage tweeter level adjustment.
- » Center speaker UP S4MB-CTR supports the automatic emergency call function.
- Perfectly combinable with further MATCH UPGRADE components – e.g. DSP amplifier.
- » Front subwoofers UP W8MB-S4 are available as left hand drive and right hand drive version.












» Surround



» Center

MERCEDES MATCH UPGRADE SPEAKERS



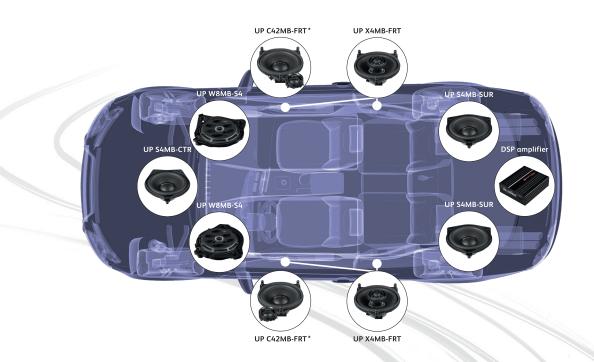

Mercedes vehicle compatibility (Status May 2019):

Model	Model type	Series	Model year	Front door	Rear door	Center	Surround	Front sub.
С	Convertible	A205	From 2016	UP X4MB-FRT / UP C42MB-FRT*	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	Coupe	C205	From 2015	UP X4MB-FRT / UP C42MB-FRT*	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	Sedan	W205	From 2014	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	T-model	S205	From 2014	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
E	Convertible	A238	From 2017	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	Coupe	C238	From 2017	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	Sedan	W213	From 2016	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	T-model	S213	From 2016	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
GLC	SUV	X253	From 2015	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
	SUV coupe	C253	From 2015	UP C42MB-FRT	UP X4MB-FRT / UP C42MB-FRT*	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4
S	Sedan	W222	From 2013	UP C42MB-FRT	UP C42MB-FRT	UP S4MB-CTR	UP S4MB-SUR	UP W8MB-S4

^{*} For installation the cover incl. tweeter mounting fixture of the Mercedes Burmester sound system is required.

Technical Data:

	UP C42MB-FRT	UP X4MB-FRT	UP S4MB-SUR	UP S4MB-CTR	UP W8MB-S4	
Power RMS / max.	60 / 120 Watts	60 / 120 Watts	60 / 120 Watts	60 / 120 Watts	100 / 200 Watts	
Frequency response	90 Hz - 25,000 Hz	90 Hz - 25,000 Hz	90 Hz - 20,000 Hz	90 Hz - 20,000 Hz	25 Hz - 250 Hz	
Impedance	4Ω	4Ω	4 Ω	2 x 4 Ω	4 Ω	
Efficiency 1 W / 1 m	89 dB	89 dB	89 dB	89 dB	88 dB	
Cone material	TW: Coated silk dome W: Coated paper	TW: Coated silk dome W: Coated paper	Coated paper	Coated paper	Coated paper	
Crossover	Separate, 6 dB slope with 3-stage tweeter level adjustment	Integrated, 6 dB slope	-	-	-	

MATCH by Audiotec Fischer or Audiotec Fischer GmbH is in no way affiliated with the Daimler AG or any of its subsidiaries or affiliated companies connected to, or is acting on its behalf or with its authorization. All registered product names, trademarks and brands are the property of their respective owners.



^{**} An up-to-date list of vehicle compatibility can be found at www.audiotec-fischer.com